GS-40T UNDERBENCH DISHWASHER



| Racks/hour (theoretical) | 60/40/30/20 |
|--------------------------|-----------------------|
| Cycle time *1 | 69/90/120/180 sec |
| Power supply | 240V |
| Wash pump | 400 W |
| Booster heater | 2800 W |
| Wash tank heater | 1250 W |
| Total power | 3.45 kW |
| Total current | 14.5 Amp |
| Wash tank capacity | 14.5 ltrs |
| Booster heater capacity | 3.4 ltrs |
| Water consumption (per | cycle) 1.8 ltrs |
| Min/max water pressure | *2 200/600kPa |
| Min/max water temp *3 | 50/65°C |
| Rinsing Temp (approx) | 85°C |
| Rack size | 400 x 400 mm |
| Useful height | 305 mm |
| Weight (empty) | 37 kg |
| Weight (shipping) | 48 kg |
| Dimension (shipping) | 62 x 53 x 83cm |
| Drain Type Pur | nped (min 3ltr / sec) |
| Water connection | 3/4" hose |
| Required hot water supp | ly 55 ltr/hr |
| Drain hose diameter | , 24 mm |
| | |

- *1 All Machines fitted with thermostop which may may effect cycle time
- *2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa
- *3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

WaterMark

S STANDARD FEATURES

- Double skin door
- Door safety switch
- Thermostop
- Built-in rinse aid injector
- Soft touch panel with temp & alarms
- 4 wash cycles plus self cleaning cycle
- Fully automatic washing process
- Drain pump
- Low water consumption
- Backflow prevention valve
- Easy to remove nozzles
- One piece double filter & overflow




Having extra washing power, the GS-40T is ideal for glassware and also for washing cups, saucers and light lunch plates.

The GS-40T compact barwasher is the perfect solution for coffee shops, lunch rooms, tea houses, bars and offices.

Featuring a built in timed drain pump, the machine can be installed in situations where the actual waste connection is above the machine outlet point (max 500mm). The timed drain pump can be adjusted to suit varying conditions and the machine can be installed above or under counter.

This machine takes a 400 x 400mm rack or can be adapted to accommodate standard 17" x 14" bar racks.

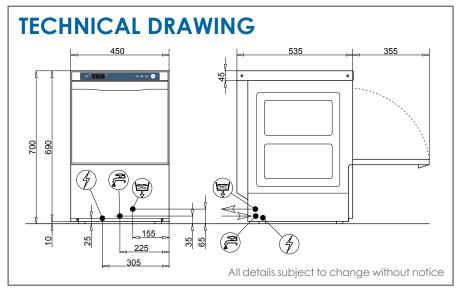

Call Rhima Australia 📕

www.rhima.com.au

Australia • New Zealand • Singapore

Version: 1.0